

Label Printer



QUICK USER GUIDE

Compatible for Q1/P1/R1/G1/B1

Huainan Chongqu Electronic Technology Co., Ltd.

2023.Aug

01 PACKING LIST

01

Q1 LABEL
PRINTER



02

USB DATA
CABLE *1



03

BUILT IN
BAFFLE *1



04

BUILT IN
RECHARGEABLE
BATTERY *1



SAFETY WARNING



「 SAFETY >
INSTRUCTIONS 」

THIS PRODUCT IS NOT EQUIPPED WITH A STANDARD POWER ADAPTER. PLEASE BE SURE TO USE 3C CERTIFICATION AND MEET THE STANDARD REQUIREMENTS.



**FRONT
SIDE**

97.6mm



**REVERSE
SIDE**

49mm



03 EQUIPMENT PARAMETERS



PRINT METHOD

Thermal printing



CONNECTION MODE

Android & iOS & PC



PRINT SPEED

20-50mm/s



POWER ACCESS

DC 5V/1A



DOT EACH ROW

384 dot/line



PAPER ROLL DIAMETER

38mm



PRINT WIDTH

48mm



PAPER THICKNESS

0.06~0.08mm



PRINT INTERFACE



Bluetooth + USB



BARCODE TYPE



Barcode/QRcode

illustration



- ① Cover opening handle
- ② Circular button
- ③ Left baffle
- ④ Right baffle
- ⑤ USB interface
- ⑥ Paper storage

Maintenance Tips


-  We recommended you to charge regularly to prevent battery aging if the machine is not used for a long time.
-  It is recommended to clean and maintain the print head regularly. Use a cotton swab dipped in alcohol to wipe the print head and prolong its service life.

05 PAPER ROLL INSTALLATION




Step 1

Please gently pull the cover opening handle to open the paper storage

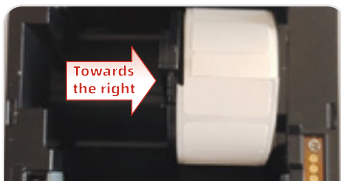

Step 2

Please put the paper roll to the right, slide the right baffle to align with the edge (the baffle buckle unlocks upwards)

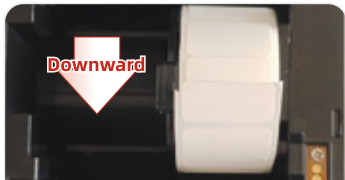

Step 3

Please push down the baffle buckle to lock the position of the baffle



Step 4

Please fasten the cover down and press the paper head.



Press on the button
feeding test





The only button (circular button) for this series of models is located on the bottom half centered

① Power Off State

Press the button, the indicator light comes on, enter the initial state, and the printer is ready to print.

② Power On State

Click once to automatically feed one paper

③ Power On State


Long press (hold for about 3 seconds or more) to enter the Power Off state, the indicator light off

④ Power On State



When opening the paper storage, it will sound once and the indicator light will change, when closing the paper storage, it will automatically feed one paper


Note: There may be slight changes following firmware upgrades

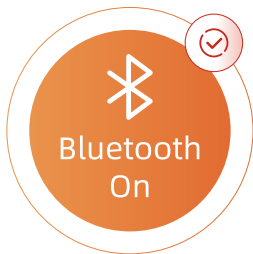PRECONDITONS



STEPS OF CONNECTION


-  Click on the connection button from the setting interface
 or click the print icon in the upper right corner of the home page.



Step 1


Select the printer you want to connect

Choose the Bluetooth device matching the corresponding printer model




Step 2

Bluetooth setting pairing request



Step 3


Pairing Bluetooth devices





Step 4

the corresponding Bluetooth device "connected"



Note: There may be slight changes following firmware upgrades

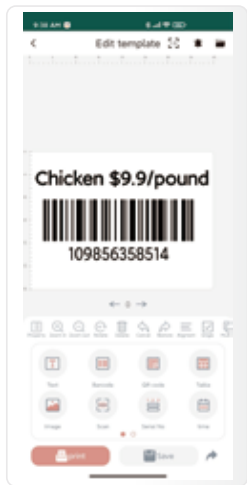

 app Loading APP



Note: There may be slight changes following firmware upgrades

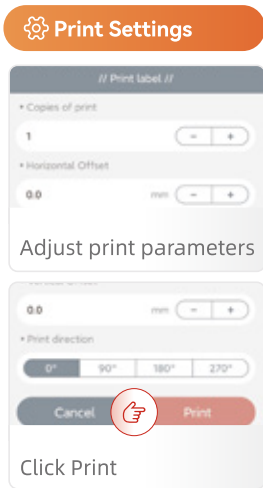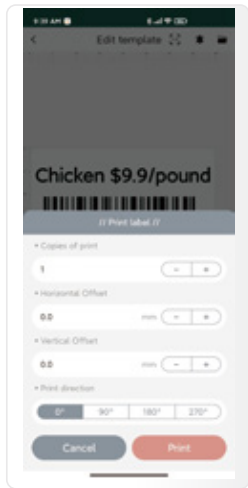

Note: There may be slight changes following firmware upgrades

PUQU

🌐 **PUQULABEL.COM**



APP Download



PUQU Official Account

NOTE:

Thank you very much for ordering our PUQU products. In order to better serve our customers, we have a dedicated customer service team to coordinate any issues. If you cannot receive a verification code when registering for QU PRINTING, please contact our customer service representative to register.

The email address is:
service.int@puqulabel.com Or puqu1773@hotmail.com